


Фрезы концевые твердосплавные с износостойким покрытием TiAlN

Универсальная геометрия режущей части.

Мелкозернистый твердый сплав.

Твердость обрабатываемого материала до 45 HRC.

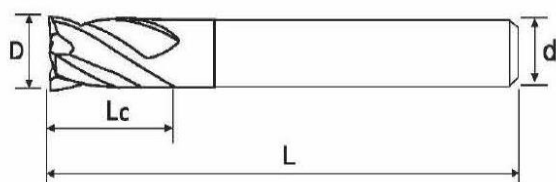

Обозначение	D	d	L _c	L	Z
AK020.103	2	4	7	50	3
AK025.103	2,5	4	8	50	3
AK030.103	3	4	8	50	3
AK030.104	3	4	8	50	4
AK040.103	4	4	11	50	3
AK040.104	4	4	11	50	4
AK040.104L	4	4	19	50	4
AK050.103	5	5	13	50	3
AK050.104	5	5	13	50	4
AK050.104L	5	5	24	58	4
AK060.103	6	6	13	50	3
AK060.104	6	6	13	50	4
AK060.104L	6	6	24	68	4
AK070.103	7	8	16	60	3
AK070.104	7	8	16	60	4
AK080.103	8	8	19	60	3
AK080.104	8	8	19	60	4
AK080.104L	8	8	38	100	4
AK090.103	9	10	19	75	3
AK090.104	9	10	19	75	4
AK100.103	10	10	22	75	3
AK100.104	10	10	22	75	4
AK100.104L	10	10	45	100	4

**Надежность
в качестве!**

mail@akytex.ru

8(499)550-50-39
akytex.ru



Обозначение	D	d	L _c	L	Z
AK100.104XL	10	10	70	120	4
AK110.103	11	12	22	75	3
AK110.104	11	12	22	75	4
AK120.104	12	12	26	83	4
AK120.105	12	12	26	83	5
AK120.104L	12	12	53	110	4
AK120.104XL	12	12	70	120	4
AK140.104	14	12	26	83	4
AK140.105	14	12	26	83	5
AK140.104L	14	12	53	110	4
AK160.104	16	16	32	92	4
AK160.105	16	16	32	92	5
AK180.104	18	16	32	92	4
AK180.106	18	16	32	92	6
AK200.104	20	20	38	104	4
AK200.106	20	20	38	104	6

**Надежность
в качестве!**

mail@akyttec.ru

8(499)550-50-39
akyttec.ru